

BEC

Akustik

More than 25 years German Engineering





IC 120

► TECHNICAL DATA

Impedance	4 Ohm
Frequency range	150-20000 Hz
System	Line array speaker
Full range speaker	4 x (20x120 mm)
Power rating	40 W
Peak music power	80 W

► RADIATION

Radiation angle, horizontal	160°
Radiation angle, vertical	40°
Sensitivity	88 dB/W/m
Max. rated SPL	106 dB

► HOUSING

Material	Aluminium
Colour	White, Black, Other on request
Number of speakers	4
Mounting	Metal screw-on bracket (Standard) In-Wall mounting on request
Admiss. ambient temp.	0-80 °C
Width	37.5 mm
Hight	1206 mm
Depth	23 mm



IC100

► TECHNICAL DATA

Impedance	6 Ohm
Frequency range	150 - 20000 Hz
System	Line array speaker
Full range speaker	3 x (20x120 mm)
Power rating	30 W
Peak music power	60 W


► RADIATION

Radiation angle, horizontal	160°
Radiation angle, vertical	40°
Sensitivity	86 dB/W/m
Max. rated SPL	102 dB

► HOUSING

Material	Aluminium
Colour	White, Black, Other on request
Number of speakers	3
Mounting	Metal screw-on bracket (Standard) In-Wall mounting on request
Admiss. ambient temp.	0 - 80 °C
Width	37.5 mm
Hight	998 mm
Depth	23 mm



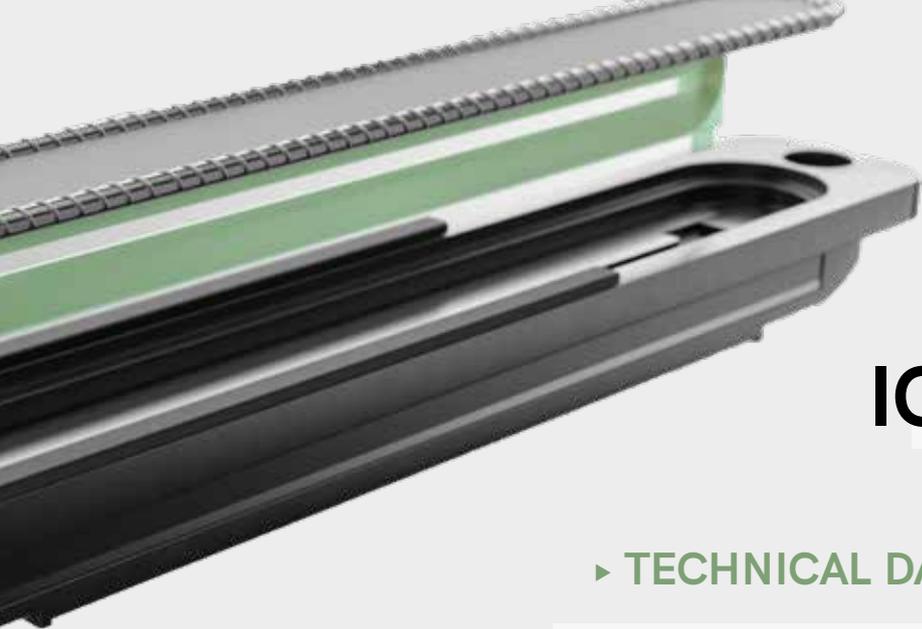

IC 70

► TECHNICAL DATA

Impedance	6 Ohm
Frequency range	150-20000 Hz
System	Line array speaker
Full range speaker	3 x (20x120 mm)
Power rating	30 W
Peak music power	60 W

► RADIATION

Radiation angle, horizontal	160°
Radiation angle, vertical	40°
Sensitivity	86 dB/W/m
Max. rated SPL	102dB/W/m

► HOUSING

Material	Aluminium
Colour	White, Black, Other on request
Number of speakers	3
Mounting	Metal screw-on bracket (Standard) In-Wall mounting On request
Admiss. ambient temp.	0 - 80 °C
Width	36.5 mm
Hight	698 mm
Depth	23 mm



IC 50

► TECHNICAL DATA

Impedance	8 Ohm
Frequency range	150-20000 Hz
System	Line array speaker
Full range speaker	2x(20x120 mm)
Power rating	20W
Peak music power	40 W


► RADIATION

Radiation angle, horizontal	160°
Radiation angle, vertical	40°
Sensitivity	84 dB/W/m
Max. rated SPL	98 dB

► HOUSING

Material	Aluminium White, Black, Other on request
Number of speakers	2
Mounting	Metal screw-on bracket (Standard) In-Wall mounting on request
Admiss. ambient temp.	0 - 80 °C
Width	37.5mm
Hight	498 mm
Depth	23 mm



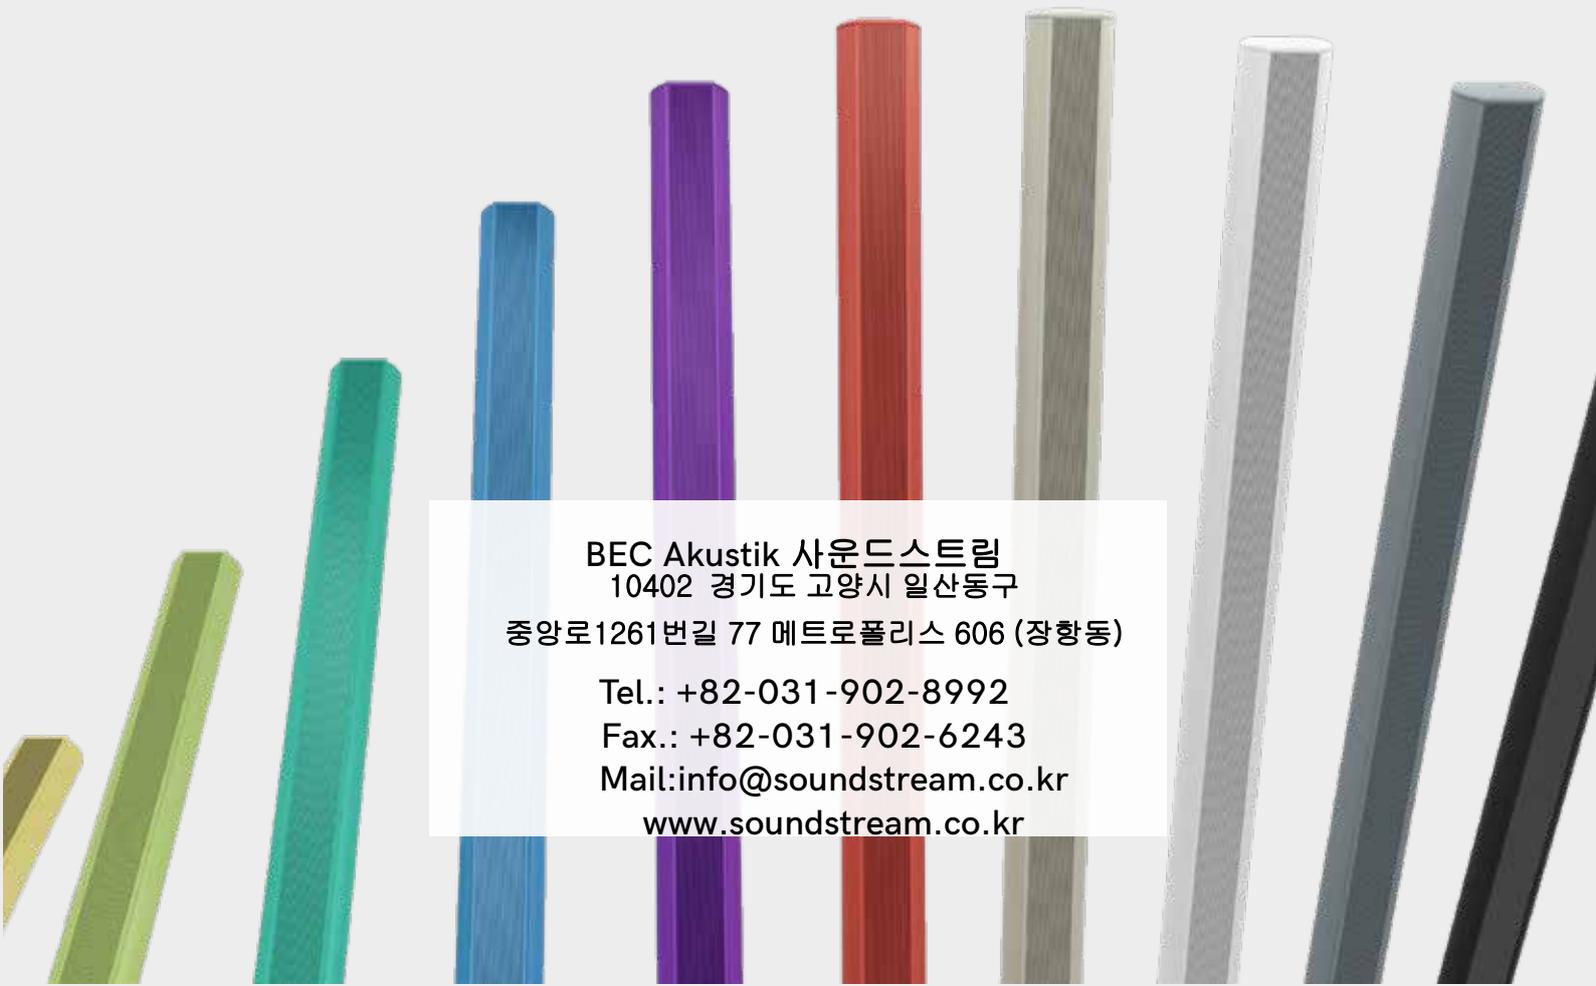

BEC Akustik 사운드스트림
10402 경기도 고양시 일산동구

중양로1261번길 77 메트로폴리스 606 (장항동)

Tel.: +82-031-902-8992

Fax.: +82-031-902-6243

Mail: info@soundstream.co.kr

www.soundstream.co.kr